


Datalogging Instructions Sheet


The data log is taken by inserting a **USB into the ECU while the controller has power.**

Step by step instructions are provided below:

1. Remove the relay board lid

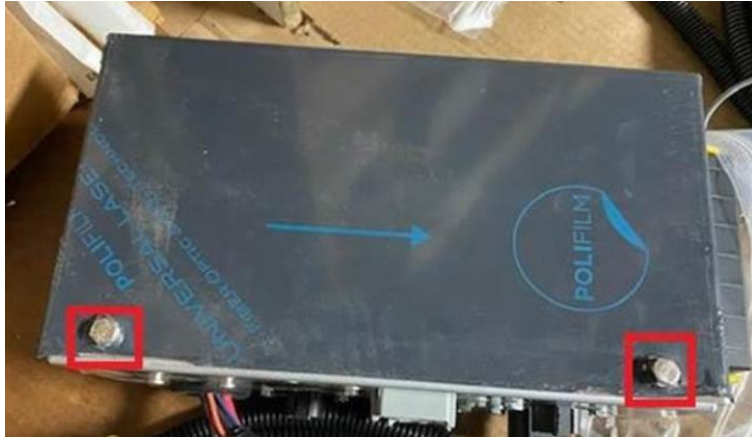

2. Power up the controller/system
3. Insert the USB on the bottom of the ECU, beside the connectors (as shown below in the red squares)

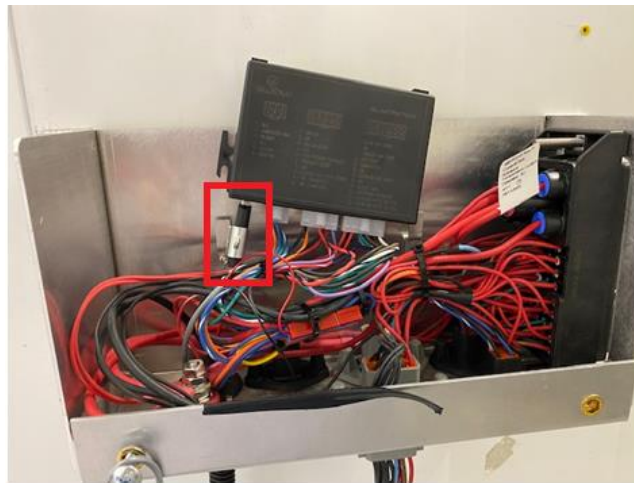


4. Remove the USB **after the log has finished** saving

After inserting the USB, the controller display will begin to indicate that the USB/Pendrive has been inserted, the log is being saved and that the USB/Pendrive should not be removed. After the log has been saved, the controller will indicate the Log is done and that the USB/Pendrive can be removed.



Renaming Data log files

1. Plug the USB into any Windows or Mac device.
2. Open the enclosing folder
3. Find the log file and right mouse click to "Rename"

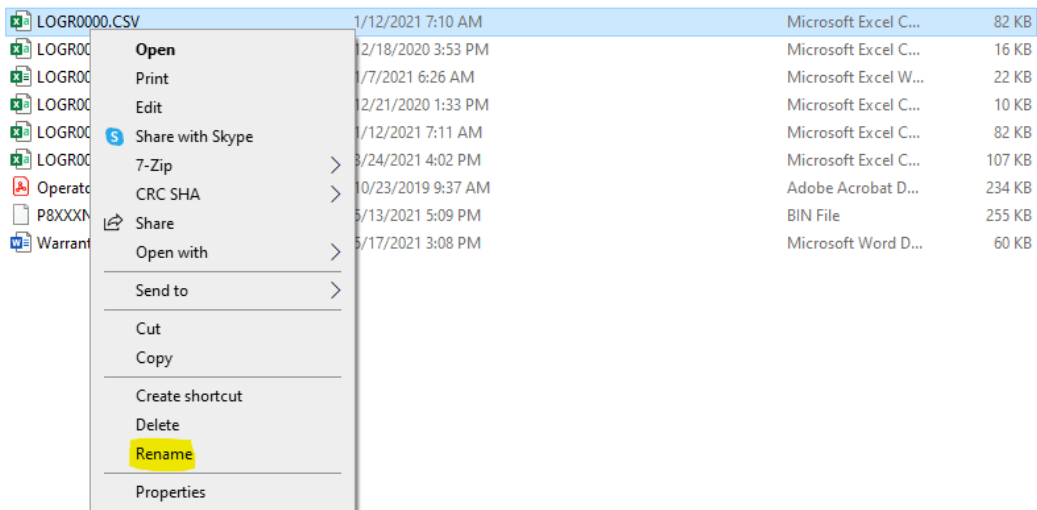

5. Rename the data log file in the following format:

DEALER_CLAIM#_MASTERSERIAL#.csv